

Assembly Guide




Connect the Basic Unit to the power supply (1) and check if the SD Card is placed in the SD Card slot (2) in the back of the basic unit

Connect the Contra-angle (Iso E-Connection) with the Motor (3) (Must **not** be rotated!).

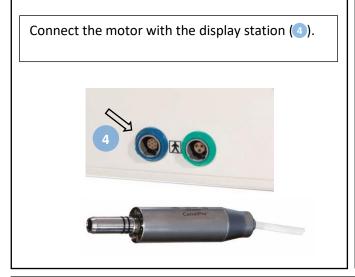

Set the footpad on the floor within working distance of the basic unit.






Assemble the Apex locator set and insert it into the Basic Unit (5).


Apex locator cable set consisting of:

- a Measuring cable with plug
- b Lip clip
- c Cap for socket (for hygienic use of lip clip)
- d Cable for file clamp (if applicable)
- e File clamp (if applicable))




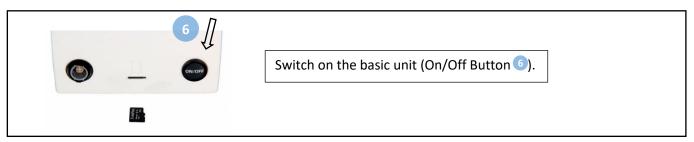

First Steps

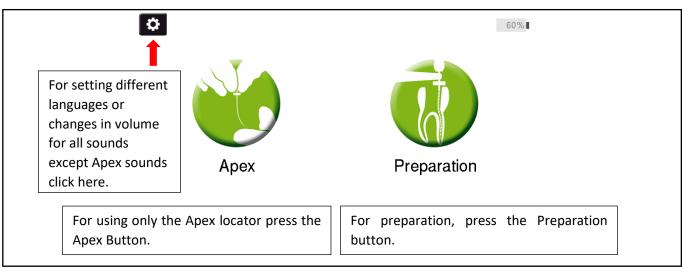




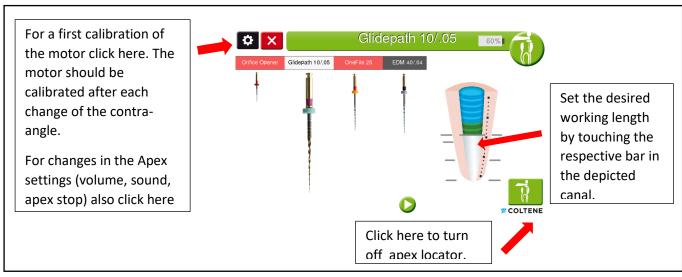



Set your individual settings for sounds, volume and apex stop here.

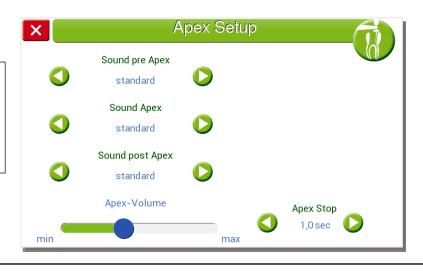



Start the motor by pressing down the foot switch.





Apply gentle and continuous pressure to the file during preparation.

Hold the pressure until an acoustic signal sounds (long tone), which indicates that the canal must be irrigated.

Remove the file from the canal, irrigate the canal and then proceed further with preparation as described above.

When the acoustic signal for file change sounds (several short tones), please change the file.



Doctor's choice – setup

In each file setup in the Doctor's choice mode different movement types, torque and speed levels can selected.

