

HYDRIM® G4

L110W G4 Instrument Washer



Automated Instrument Washing the first step in the sterilization process



Efficient

The time saved by automated washing compared to manual cleaning is approximately 1 hour of labour for every nine procedural set-ups¹. HYDRIM L110W G4 cycle times are as fast as 44 minutes from start to dry. HYDRIM ensures that every set of instruments receives the same validated cleaning process.



G4 Technology

There is nothing like SciCan's G4 Technology. The large touch screen gives in-depth cycle information and allows users to view current operations.

From the networking portal, users can access cycle history and validation information. If there is ever a cycle fault, the G4 software will send an email to the office and the service technician, allowing remote troubleshooting.



Safe

Avoid the many steps involved with manual washing or using ultrasonic cleaners. Steps such as pre-soaking, scrubbing and drying instruments before sterilization increase the exposure to blood and body fluids and the risk of sharps injuries.

Automated instrument washing reduces physical handling of contaminated instruments. Using the HYDRIM G4 instrument washer is the safer and more effective option, decreasing the risk of exposure and injuries. HYDRIM G4 saves time and money—making it a worthy investment for today's standard of care.



Capacity

HYDRIM L110W G4 has a 10 full-size cassette capacity allowing offices to turn over 2500 instruments in a 10 hour day.

¹ Tholen, Mark. "Increase production and decrease expenses in sterilization." Dental Economics, Volume 99, Issue 10, October 1, 2009.

HYDR/M L110W G4 Specifications

Unit Size

Dimensions (W x H x D):	598 x 850 x 600 mm / 23.54" x 33.5" x 23.75"
Depth with Door Open:	1200 mm / 47"
Weight:	80 kg / 176 lb

Cycle Times*

Rinse and Hold	17 min
Regular Wash + Dry	25 min + 10 min
Heavy Duty Wash + Dry	34 min + 10 min

Water Consumption Per Cycle

Rinse and Hold	16 L / 4.23 Gal
Regular Wash	24 L / 6.34 Gal
Heavy Duty Wash	32 L / 8.45 Gal

Electrical Connection

North America	208-240 V, 15 A, 60 Hz
Running Noise	< 78 dB (Wash)

Water and Drain Connections

Hot and Cold Water Tap Connection	3/4" Garden Hose, Male
Recommended Hot Water Temperature	60° C / 140° F
Cold Water Temperature	< 30° C / 86° F
Inlet Water Pressure	1-10 bar / 14.5-145 psi
Drain	2 cm / 3/4"

*Actual cycle times will vary with incoming water temperature and pressure.

Recommended Accessories

Part Number	Description
01-109963S	5-Cassette Rack, Full Size
01-109964S	5-Cassette Rack, Half Size
01-109965S	4 XL Cassette Rack, Full Size
01-109967S	Hygiene Basket
01-107240	STATIM 2000 Basket
01-107241	STATIM 5000 Basket
01-108232	Long Basket
CS-HIPL	HIP Cleaning Solution L110w



VistaPure™ Water Filtration


Provides two grades of high-quality water for autoclaves, dental bottles, ultrasonic cleaners and the rinse cycle of instrument washers.

V3000

HYDR/M VistaPure Connection

Protect expensive instruments and equipment by using the VistaPure system's hyperfiltered water for the final-rinse cycle of the HYDR/M for a spot-free finish.

V3010

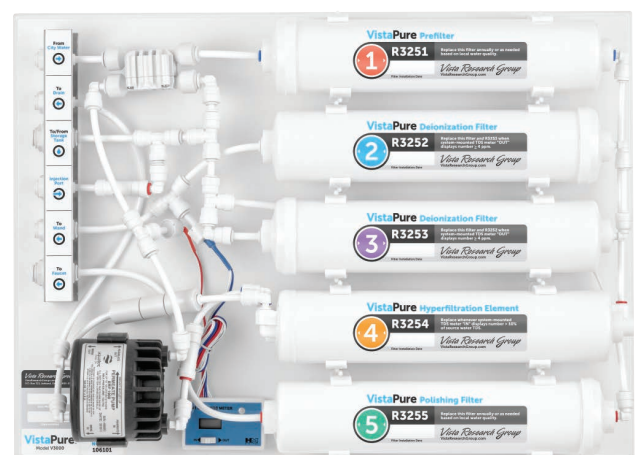

VistaPure Water Filtration shown above.

Manufactured by:

SciCan Ltd.

1440 Don Mills Rd., Toronto, ON, Canada, M3B 3P9
Tel: 416-445-1600 Toll free: 1-800-667-7733
customerservice@scican.com

VistaPure is manufactured by:

Vista Research Group

1244 County Road 1475, Ashland, OH 44805 USA
Tel: (419) 281-3927
VistaResearchGroup.com

www.scican.com

SD-550 CA EN R2 HYDR/M is a registered trademark of SciCan Ltd. VistaCool and VistaPure are trademarks of Vista Research Group.

COLTENE